


Application

- Generally functional covers designed to withstand slow moving traffic.
- Typically used in service areas, dockyards and airports. Also sees usage on grass verges.

Technical Description

- Manufactured from S275J2 mild steel
- Hot-dip galvanized finish 70µm minimum coating according to ISO1461
- Robust keyways to accept industry standard lifting keys
- Fabricated with a durbar pattern top to provide non-slip properties
- Bolt fixing provision to ensure maximum performance
- **Available in FACTA loadings:**



- For more info, see our [FACTA FAQ](#)

Options

- Frame depths from 47mm to 63mm (loading dependent)
- Hot-dip galvanized coating to 100µm or 140µm
- Stainless steel (304 or 316)
- Double and single neoprene seal available
- Locking
- Identification marking




Accessories

- Looped handled lifting key (COM0000048)
- Fixing Bolt (COM0000309)

Opening Dimensions

- Standard clear openings include:

300x300mm	750x750mm
450x450mm	900x900mm
600x600mm	1000x1000mm
- Bespoke sizes available upon request
- 250x250mm to a maximum of 1000x1000mm

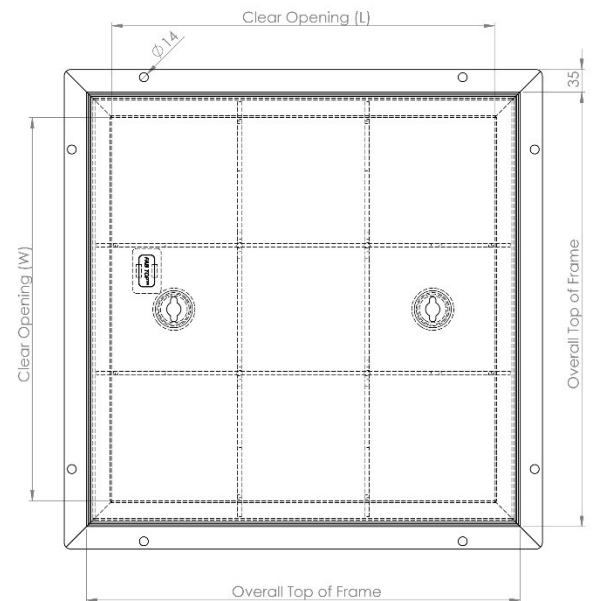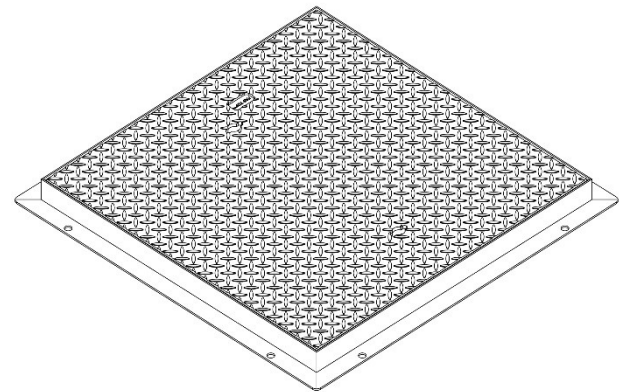

* Reinforcing configuration dependent on load

